



BEVERAGE-AIR

Item No _____

Quantity _____

REACH-IN
FREEZERS

KSeries™

MODELS:

KF12

KF24

KF36

KF48

KF74

COMMERCIAL REFRIGERATION EQUIPMENT GENERAL SPECIFICATIONS

K-SERIES KOOLATEER

CONSTRUCTION:

Heavy duty construction includes stainless front (doors and grilles) with #3 finish. Exterior sides are steel with gray finish. Exterior top, back, and bottom are galvanized steel. Exterior mounted thermometer is drum type. Interior of cabinet is white coating baked on steel. Interior pilasters are "regular" type. Interior shelves are white coated steel wire. Door locks standard (except KF12). Casters are standard.

REFRIGERATION:

Unit's system is located at bottom of cabinet. Defrosting is accomplished with electric heaters. Defrost is time initiated, temperature terminated. A time termination is provided as a back up fail-safe. Evaporator fans are delayed from restarting until evaporator coil is adequately chilled down. Operation of compressor is governed by temperature control inside top of cabinet.

AIR DISTRIBUTION:

Beverage-Air's unique air distribution provides the ideal environment for food preservation. Refrigerated air is discharged from an evaporator coil compartment located at the interior top of cabinet. Air is discharged down the rear of cabinet. Air is returned upward across the full width of the interior front assuring even temperatures throughout the cabinet.



KF12



KF24



KF36



KF74



KF48



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

C-UL optional with disconnect switch



Made in USA
<http://www.Beverage-Air.com>
<http://CCR.Carrier.com>



BEVERAGE-AIR

PO BOX 5932, Spartanburg, SC 29304-5932
1-800-845-9800 Fax # 864-582-5083

File # _____

Spec. _____




BEVERAGE-AIR

KF12, KF24, KF36, KF48, KF74

Reach-In Freezers

DIMENSIONS

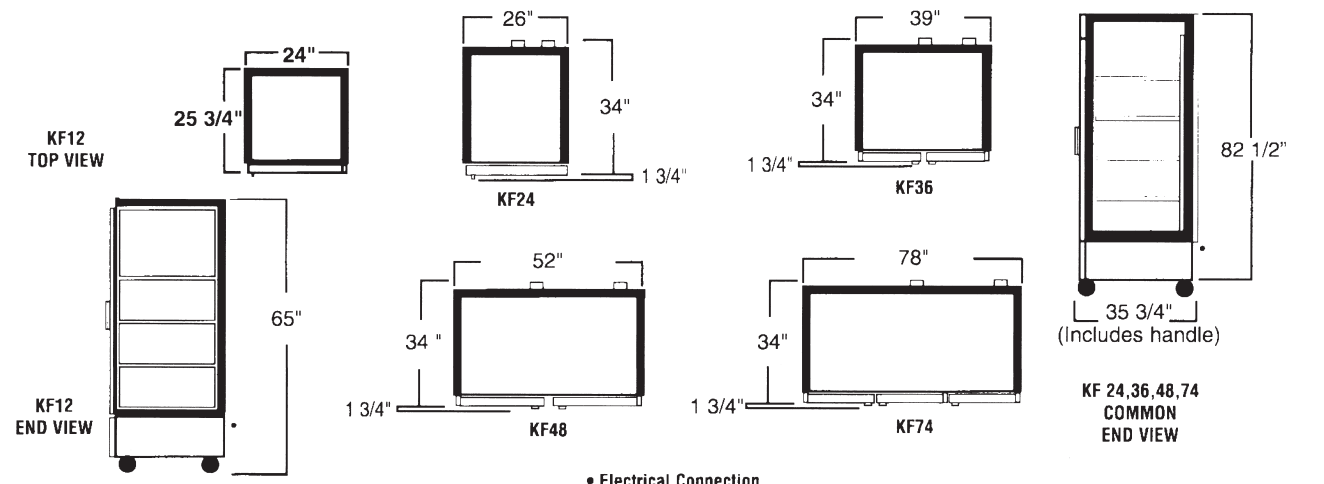

SPECIFICATIONS **KF12**

	SOLID DOOR
Exterior Width	24"
Exterior Depth, Overhandle	25 3/4"
Exterior Height, With Legs	65"
Cubic Feet	12
Cabinet Voltage (50 Cycle Available)	115
Horsepower	1/2
Amps	9.8
-20/120 BTU/HR*	1428
Crated Weight	260
Shelves	3
Shelf Dimension	18 3/4" x 20 3/4"

SPECIFICATIONS **KF24**

	SOLID DOOR
Exterior Width	26"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	20.7
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	11.0
-20/120 BTU/HR*	1920
Crated Weight	375
Shelves	4
Shelf Dimension	22 3/8" x 21 1/8"

SPECIFICATIONS **KF36**

	SOLID DOOR
Exterior Width	39"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	31.75
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	11.0
-20/120 BTU/HR*	1920
Crated Weight	550
Shelves	8
Shelf Dimension	22 3/8" x 16 1/4"

SPECIFICATIONS **KF48**

	SOLID DOOR
Exterior Width	52"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	44.9
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	12.5
-20/120 BTU/HR*	2600
Crated Weight	585
Shelves	8
Shelf Dimension	22 3/8" x 22 3/4"

SPECIFICATIONS **KF74**

	SOLID DOOR
Exterior Width	78"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	69.2
Cabinet Voltage (50 Cycle Available)	115/208-230v 60 Hz
Horsepower	1
Amps	10.5
-20/120 BTU/HR*	4000
Crated Weight	690
Shelves	12
Shelf Dimension R.H./L.H.	22 3/8" x 22 3/4"
Center	22 3/8" x 24 3/8"

KF-1224364874BW



BEVERAGE-AIR

PO BOX 5932, Spartanburg, SC 29304-5932
 1-800-845-9800 Fax # 864-582-5083
 ECPC-135451-4/03