



TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model #: _____

AIA #

SIS #

Horizontal Bottle Coolers



TD-50-18

Horizontal Bottle Coolers

- TD-24-7, TD-36-12,**
- TD-50-18, TD-65-24,**
- TD-95-38**

True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable, non-peel or chip black laminated vinyl exterior.
- All stainless steel countertop and lids.
- Interior - long lasting heavy duty galvanized steel. Construction of liner in accordance with NSF standards.

DOORS:

- Easy glide stainless steel lid.

INSULATION:

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - runs length of cooler for efficient balanced cooling, epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.
- Self-contained system.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1
NEMA-5-15R

Also available:

- **Stainless Steel Exterior Horizontal Bottle Coolers**

Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Specifications subject to change without notice.


Printed in U.S.A.



APPROVALS:

2/03

Exceptions:

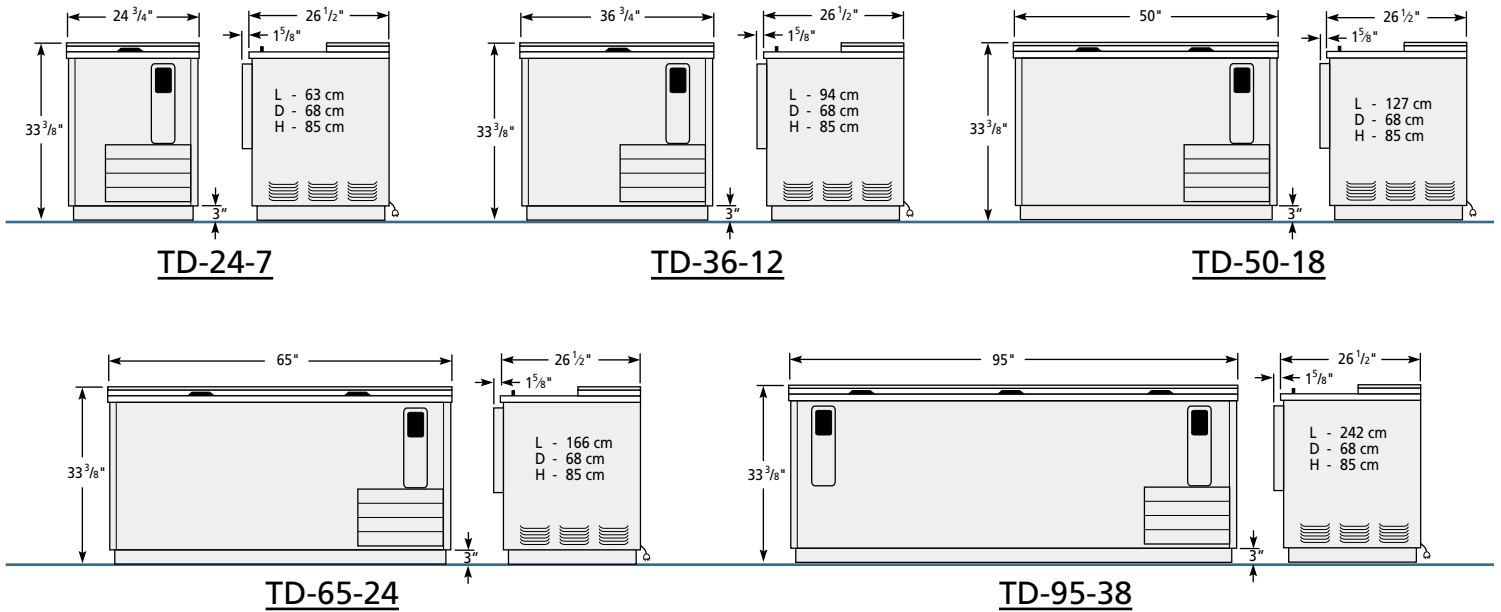

Rough-In Data													
Model	Type Unit	Capacity (12 oz. btls. / 12 oz. cans)	Bin Dividers	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D†	H							
TD-24-7	Deep well	4 cases / 7 cases	2	24 3/4	26 1/2	33 3/8	1/4	115	1	2.6	5-15	7	175
TD-36-12	Deep well	12 cases / 18 cases	2	36 3/4	26 1/2	33 3/8	1/5	115	1	4.6	5-15	7	208
TD-50-18	Deep well	18 cases / 23 3/4 cases	3	50	26 1/2	33 3/8	1/3	115	1	8.1	5-15	7	258
TD-65-24	Deep well	24 cases / 34 3/4 cases	4	65	26 1/2	33 3/8	1/3	115	1	7.3	5-15	7	304
TD-95-38	Deep well	38 cases / 55 3/4 cases	7	95	26 1/2	33 3/8	1/2	115	1	9.2	5-15	7	420

* Depth does not include 1 5/8" for cap catcher.
note: All models available in stainless steel exterior.

Specifications subject to change without notice.

Standard Features

- Oversized environmentally friendly (134A) refrigeration system holds 33°F to 38°F.
- Positive guided, forced air cooling - cools bottles on top first.
- Stainless steel countertop and lids.
- Aluminum finished back.
- Durable, black laminated vinyl exterior.
- Interior - long lasting, heavy duty, galvanized steel.
- Huge capacity requires minimum floor space.
- Heavy duty vinyl coated adjustable bin dividers.
- Rugged built-on removable bottle cap opener and cap catcher.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Large evaporator coil virtually runs length of cooler for efficient balanced cooling.
- Air vents on side of cooler.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.

Low Temperature Models Available

- Hold 20°F for applications with high ambient temperatures. Designed for alcohol beverages only (note: some low alcohol products freeze below 32°F).

Optional Accessories

- Available with optional stainless steel or seismic legs.
- Available with 2 1/2" or 3" diameter stem castors.
- Optional ratchet locks available.

Model	Front	Right	Plan	3D
TD-24-7	TFKY06E	TFKY01S	TFKY06P	TFKY063
TD-36-12	TFKY04E	TFKY01S	TFKY04P	TFKY043
TD-50-18	TFKY03E	TFKY01S	TFKY03P	TFKY033
TD-65-24	TFKY02E	TFKY01S	TFKY02P	TFKY023
TD-95-38	TFKY01E	TFKY01S	TFKY01P	TFKY013

Clearance Required For Coolers (USA)		
Sides Inches/mm	Top Inches/mm	Rear Inches/mm
1 / 26	1 / 26	1 / 26



TRUE FOOD SERVICE EQUIPMENT